

Product Data Sheet

NC-SMQ®81 Solder Paste**Features**

- Designed for use with Sn/Bi and Sn/Bi/Ag alloys
- Low temperature Pb-Free solution
- No-clean residue
- Exceptional wetting in air reflow
- Halide-free

Introduction

NC-SMQ81 is an air reflow, halide-free, no-clean solder paste designed for assembly processes using the eutectic Sn/Bi and Sn/Bi/Ag alloys. This paste is a moderate residue product with exceptional wetting capabilities. The low activation temperature of **NC-SMQ81**, in combination with the Sn/Bi alloy, can be especially useful as a low temperature, Pb-Free solution. In addition **NC-SMQ81** meets J-STD-004, -005 test criteria.

Alloys

Indium Corporation manufactures low-oxide spherical powder composed of the 58Bi/42Sn eutectic alloy in the industry standard type 3 mesh size. Other non-standard mesh sizes are available upon request. The weight ratio of the flux/vehicle to the solder powder is referred to as the metal load and is typically in the range of 83-92% for standard alloy compositions.

Standard Product Specifications

Alloy	Metal Load		Mesh Size	Particle Size
Indalloy #281 (58Bi/42Sn)	Printing 89%	Dispensing 84%	Type 3 -325/+500	25-45 μ 0.001-0.0018"
Indalloy #282 (57Bi/42Sn/1Ag)				

Packaging

Standard packaging of **NC-SMQ81** is packaged in 4oz. jars and 6oz. and 12oz. cartridges. For dispensing applications, 10cc and 30cc syringes are standard. Other packaging options may be available upon request.

Storage and Handling Procedures

Refrigerated storage will prolong the shelf life of solder paste. The shelf life of **NC-SMQ81** is 6 months at storage temperatures <5°C. Storage temperatures should not exceed 25°C. When storing solder paste contained in syringes and cartridges, they should be stored tip down.

Solder paste should be allowed to reach ambient working temperature prior to use. Generally, paste should be removed from refrigeration at least two hours before use. Actual time to reach thermal equilibrium will vary with container size. Paste temperature should be verified before use. Jars and cartridges should be labeled with date and time of opening.

Technical Support

Indium Corporation's internationally experienced engineers provide in-depth technical assistance to our customers. Thoroughly knowledgeable in all facets of Material Science as it applies to the electronics and semiconductor sectors, Technical Support Engineers provide expert advice in solder properties, alloy compatibility and selection of solder preforms, wire, ribbon and paste. Indium Corporation's Technical Support engineers provide Rapid Response to all technical inquiries.

Material Safety Data Sheets

The MSDS for this product can be found online at <http://www.indium.com/techlibrary/msds.php>

OVER→

BELLCORE AND J-STD TESTS & RESULTS

Test	Result	Test	Result
J-STD-004 (IPC-TM-650)		J-STD-005 (IPC-TM-650)	
• Flux Type Classification	ROLO	• Typical Solder Paste Viscosity (Indalloy #281, 89%, -325/+500) Brookfield (5 rpm)	900 kcps
• Flux Induced Corrosion (Copper Mirror)	Pass	• Typical Thixotropic Index; SSF (ICA Test)	-0.6
• Presence of Halide	Pass	• Slump Test	Pass
Silver Chromate Fluoride Spot Test	Pass	• Solder Ball Test	Pass
• Post Reflow Flux Residue (ICA Test)	56%	• Typical Tackiness	37g
• Corrosion	Pass	• Wetting Test	Pass
• SIR	Pass		
• Acid Value	116		

All information is for reference only. Not to be used as incoming product specifications.

Form No. 97721 R7

ASIA: Singapore, Cheongju: +65 6268 8678
 CHINA: Suzhou, Shenzhen, Liuzhou: +86 (0)512 628 34900
 EUROPE: Milton Keynes, Torino: +44 (0) 1908 580400
 USA: Utica, Clinton, Chicago: +1 315 853 4900



ISO 9001
REGISTERED

©2008 Indium Corporation

NC-SMQ®81 Solder Paste

Printing

Stencil Design:

Electroformed and laser cut/electropolished stencils produce the best printing characteristics among stencil types. Stencil aperture design is a crucial step in optimizing the print process. The following are a few general recommendations:

- Discrete components — A 10-20% reduction in stencil aperture area may significantly reduce or eliminate the occurrence of mid-chip solder beads. The “home plate” design is a common method for achieving this reduction.
- Fine pitch components — A surface area reduction is recommended for apertures of 20 mil pitch and finer. This reduction will help minimize solder balling and bridging that can lead to electrical shorts. The amount of reduction necessary is process dependent (5-15% is common).
- A minimum aspect ratio of 1.5 is suggested for adequate release of solder paste from stencil apertures. The aspect ratio is defined as the width of the aperture divided by the thickness of the stencil.

Printer Operation:

The following are general recommendations for stencil printer optimization. Adjustments may be necessary based on specific process requirements:

- Solder Paste Bead Size: 20-25mm diameter
- Print Speed: 12.5-50mm sec
- Squeegee Pressure: 0.018-0.027kg/mm of blade length
- Underside Stencil Wipe: Once every 10-25 prints
- Solder Paste Stencil Life: >8 hrs. @ 30-60% R.H. & 22-28°C

Cleaning

NC-SMQ81 is designed for no-clean applications, however the flux can be removed if necessary by using a commercially available flux residue remover.

Stencil Cleaning: This is best-performed using an automated stencil cleaning system for both stencil and misprint cleaning to prevent extraneous solder balls. Most commercially available stencil cleaning formulations including isopropyl alcohol (IPA) work well.


Compatible Products

- Rework Flux: TACFlux 021

This product data sheet is provided for general information only. It is not intended, and shall not be construed, to warrant or guarantee the performance of the products

Reflow

Recommended Profile:

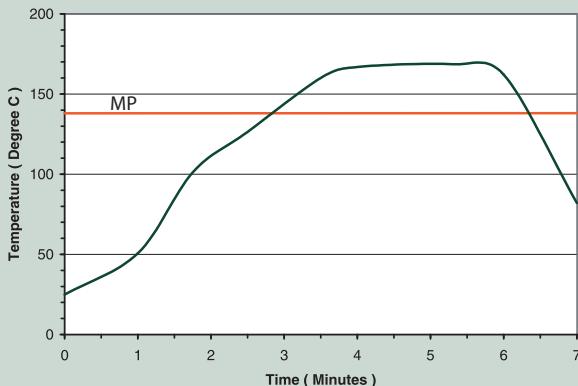

This profile is designed for use with Indalloy #281 and can serve as a general guideline in establishing a reflow profile for use with other alloys. Adjustments to this profile may be necessary based on specific process requirements.

Heating Stage:

A linear ramp rate of 0.5°-1°C/second allows gradual evaporation of volatile flux constituents and prevents defects such as solder balling/beading and bridging as a result of hot slump. It also prevents unnecessary depletion of fluxing capacity when using higher temperature alloys.

Liquidus Stage:

A peak temperature of 25°-45°C (175°C shown) above the melting point of the solder alloy is needed to form a quality solder joint and achieve acceptable wetting due to the formation of an intermetallic layer. If the peak temperature is excessive, or the time above liquidus greater than the recommended 30-90 seconds, flux charring, excessive intermetallic formation and damage to the board and components can occur.

Cooling Stage:

A rapid cool down of <4°C/second is desired to form a fine grain structure in the solder joint. Slow cooling will form a large grain structure, which typically exhibit poor fatigue resistance. If excessive cooling (>4°C/second) is used, both the components and the solder joint can be stressed due to a high CTE mismatch.



©2008 Indium Corporation

ASIA: Singapore, Cheongju: +65 6268 8678
 CHINA: Suzhou, Shenzhen, Liuzhou: +86 (0)512 628 34900
 EUROPE: Milton Keynes, Torino: +44 (0) 1908 580400
 USA: Utica, Clinton, Chicago: +1 315 853 4900

